

# DATASHEET

S01.01.01.353\_MAXWELL-SL-10-T2M\_G2

## Street Lighting:

IESNA Type II (medium) beam .

50x 50 mm, 2X4+2 arrays for 5050 size LED packages.







## 1.General Information

Lens Material	: PC
Size	: 50X50mm
typ.FWHM	: Asymmetric
Design LED	: LUXEON 5050 SQUARE
Compatibility	: 3535/3030/5050
typ.Efficiency	: 92%
Fasten	: Screw
IP class	: N/A
Zhaga	: N/A
RoHS	: YES
Color	: Clear



## 2.MECHANICAL SPECIFICATION

UNIT:mm

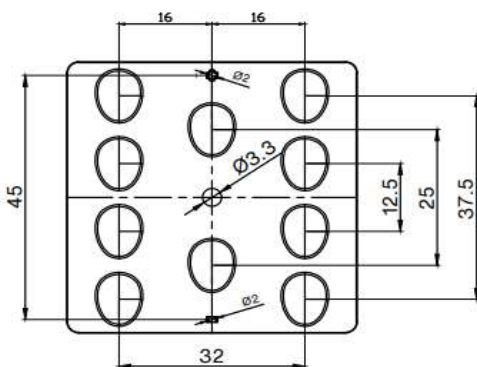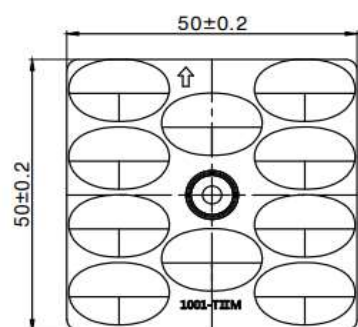

Dimensions with unmarked tolerances refer to GB/T14486 tolerance table.

### 3. OPTICAL RESULTS

#### 1) PHOTOMETRIC DATA(MEASURED):

**TYF 同一方**

LED model TYF 5050 TH


Light colour White

LEDs/each optic 1

FWHM Asymmetric

Required components:

Glass



### 4.Usage and Maintenance

- 1) If necessary, clean lenses with mild soap, water and soft cloth.
- 2) Never use any commercial cleaning solvents on lenses, like alcohol.
- 3) Please handle lens with wearing gloves, skin oils may damage lens or its optical characteristic.

### 5.Note

Please test the data again before using. The chart data is for reference only.

The appearance and specifications of the product can be changed to improve the quality and/or performance without notice.

**SUNLUMIN OPTICS CO., LTD**

5010, Plant 2, No.30, Liuhe Road, Liuyue Community,  
Henggang Str, Longgang District, Shenzhen

E  
info@sunlumin-optics.com

www.  
sunlumin.com

www.  
sunlumin-optics.com